Bandit Algorithms

Tor Lattimore & Csaba Szepesvári

DeepMind

UNIVERSITY OF ALBERTA

Bandits

Time	1	2	3	4	5	6	7	8	9	10	11	12
Left arm	$1	$0			$1	$1	$0					
Right arm			$1	$0								

Five rounds to go. Which arm would you play next?

Overview

- What are bandits, and why you should care
- Finite-armed stochastic bandits
- Finite-armed adversarial bandits

What's in a name? A tiny bit of history

First bandit algorithm proposed by Thompson (1933)

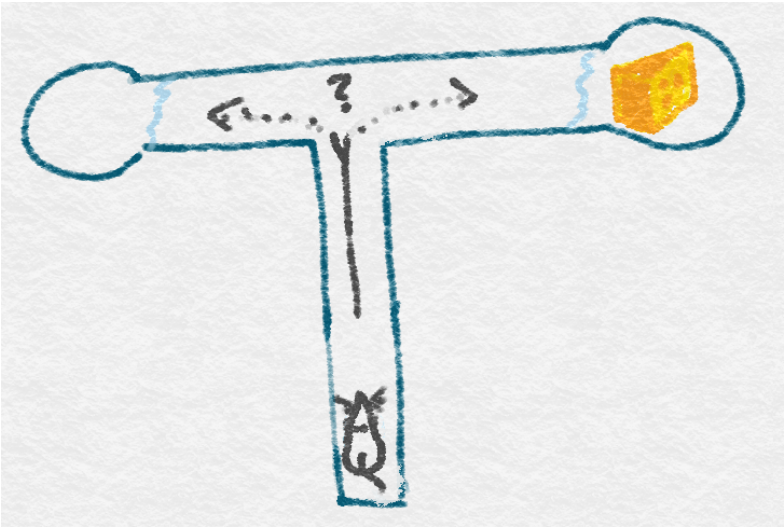

Bush and Mosteller (1953) were interested in how mice behaved in a T-maze

Why care about bandits?

1. Many applications
2. They isolate an important component of reinforcement learning: exploration-vs-exploitation
3. Rich and beautiful (we think) mathematically

Applications

- Clinical trials/dose discovery
- Recommendation systems (movies/news/etc)
- Advert placement
- A/B testing
- Network routing
- Dynamic pricing (eg., for Amazon products)
- Waiting problems (when to auto-logout your computer)
- Ranking (eg., for search)
- A component of game-playing algorithms (MCTS)
- Resource allocation
- A way of isolating one interesting part of reinforcement learning

Applications

- Clinical trials/dose discovery
- Recommendation systems (movies/news/etc)
- Advert placement
- A/B testing
- Network routing
- Dynamic pricing (eg., for Amazon products)
- Waiting problems (when to auto-logout your computer)
- Ranking (eg., for search)
- A component of game-playing algorithms (MCTS)
- Resource allocation
- A way of isolating one interesting part of reinforcement learning

Lots for you to do!

Finite-armed bandits

- K actions
- n rounds
- In each round t the **learner** chooses an action

$$A_t \in \{1, 2, \ldots, K\}\,.$$

- Observes **reward** $X_t \sim P_{A_t}$ where $P_1, P_2, \ldots, P_K$ are **unknown** distributions

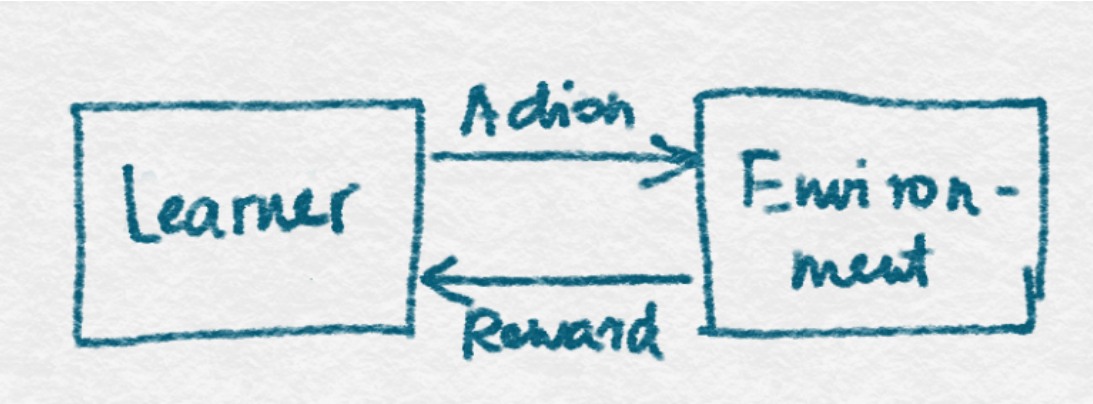

Distributional assumptions

While $P_1, P_2, \ldots, P_K$ are not known in advance, we make some assumptions:

- P_i is Bernoulli with unknown bias $\mu_i \in [0, 1]$
- P_i is Gaussian with unit variance and unknown mean $\mu_i \in \mathbb{R}$
- P_i is subgaussian
- P_i is supported on $[0, 1]$
- P_i has variance less than one
- ...

As usual, stronger assumptions lead to stronger bounds

This tutorial All reward distributions are Gaussian (or subgaussian) with unit variance

Example: A/B testing

- Business wants to optimize their webpage
- Actions correspond to ‘A’ and ‘B’
- Users arrive at webpage sequentially
- Algorithm chooses either ‘A’ or ‘B’
- Receives activity feedback (the reward)

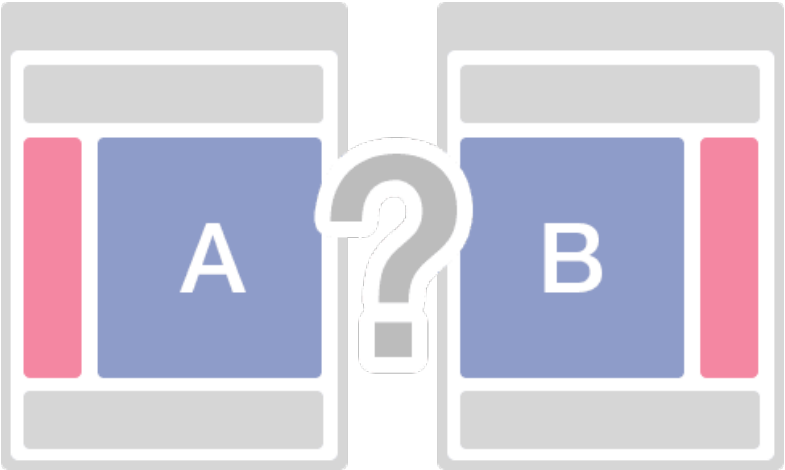

Measuring performance – the **regret**

- Let μ_i be the mean reward of distribution P_i
- $\mu^* = \max_i \mu_i$ is the maximum mean
- The **regret** is

$$R_n = n\mu^* - \mathbb{E}\left[\sum_{t=1}^{n} X_t\right]$$

- Policies for which the regret is sublinear are learning
- Of course we would like to make it as ‘small as possible’

Measuring performance – the **regret**

Let $\Delta_i = \mu^* - \mu_i$ be the **suboptimality gap** for the ith arm and $T_i(n)$ be the number of times arm i is played over all n rounds

Lemma $R_n = \sum_{i=1}^{K} \Delta_i \mathbb{E}[T_i(n)]$

Measuring performance – the **regret**

Let $\Delta_i = \mu^* - \mu_i$ be the **suboptimality gap** for the ith arm and $T_i(n)$ be the number of times arm i is played over all n rounds

Lemma $R_n = \sum_{i=1}^{K} \Delta_i \mathbb{E}[T_i(n)]$

Proof Let $\mathbb{E}_t[\cdot] = \mathbb{E}[\cdot | A_1, X_1, \ldots, X_{t-1}, A_t]$

$$R_n = n\mu^* - \mathbb{E}\left[\sum_{t=1}^{n} X_t\right] = n\mu^* - \sum_{t=1}^{n} \mathbb{E}[\mathbb{E}_t[X_t]] = n\mu^* - \sum_{t=1}^{n} \mathbb{E}[\mu_{A_t}]$$

Measuring performance – the **regret**

Let $\Delta_i = \mu^* - \mu_i$ be the **suboptimality gap** for the ith arm and $T_i(n)$ be the number of times arm i is played over all n rounds

Lemma $R_n = \sum_{i=1}^{K} \Delta_i \mathbb{E}[T_i(n)]$

Proof Let $\mathbb{E}_t[\cdot] = \mathbb{E}[\cdot | A_1, X_1, \ldots, X_{t-1}, A_t]$

$$R_n = n\mu^* - \mathbb{E}\left[\sum_{t=1}^{n} X_t\right] = n\mu^* - \sum_{t=1}^{n} \mathbb{E}[\mathbb{E}_t[X_t]] = n\mu^* - \sum_{t=1}^{n} \mathbb{E}[\mu_{A_t}]$$

$$= \sum_{t=1}^{n} \mathbb{E}[\Delta_{A_t}] = \mathbb{E}\left[\sum_{t=1}^{n} \Delta_{A_t}\right] = \mathbb{E}\left[\sum_{t=1}^{n} \sum_{i=1}^{K} \mathbb{1}(A_t = i)\Delta_i\right]$$

Measuring performance – the **regret**

Let $\Delta_i = \mu^* - \mu_i$ be the **suboptimality gap** for the ith arm and $T_i(n)$ be the number of times arm i is played over all n rounds

Lemma $R_n = \sum_{i=1}^{K} \Delta_i \mathbb{E}[T_i(n)]$

Proof Let $\mathbb{E}_t[\cdot] = \mathbb{E}[\cdot | A_1, X_1, \ldots, X_{t-1}, A_t]$

$$R_n = n\mu^* - \mathbb{E}\left[\sum_{t=1}^{n} X_t\right] = n\mu^* - \sum_{t=1}^{n} \mathbb{E}[\mathbb{E}_t[X_t]] = n\mu^* - \sum_{t=1}^{n} \mathbb{E}[\mu_{A_t}]$$

$$= \sum_{t=1}^{n} \mathbb{E}[\Delta_{A_t}] = \mathbb{E}\left[\sum_{t=1}^{n} \Delta_{A_t}\right] = \mathbb{E}\left[\sum_{t=1}^{n} \sum_{i=1}^{K} \mathbb{1}(A_t = i)\Delta_i\right]$$

$$= \mathbb{E}\left[\sum_{i=1}^{K} \Delta_i \sum_{t=1}^{n} \mathbb{1}(A_t = i)\right] = \mathbb{E}\left[\sum_{i=1}^{K} \Delta_i T_i(n)\right] = \sum_{i=1}^{K} \Delta_i \mathbb{E}[T_i(n)]$$

A simple policy: Explore-Then-Commit

1. Choose each action m times
2. Find the empirically best action $I \in \{1, 2, \ldots, K\}$
3. Choose $A_t = I$ for all remaining rounds

A simple policy: Explore-Then-Commit

1. Choose each action m times
2. Find the empirically best action $I \in \{1, 2, \ldots, K\}$
3. Choose $A_t = I$ for all remaining rounds

In order to analyse this policy we need to bound the probability of comitting to a suboptimal action

A crash course in concentration

Let $Z, Z_1, Z_2, \ldots, Z_n$ be a sequence of independent and identically distributed random variables with mean $\mu \in \mathbb{R}$ and variance $\sigma^2 < \infty$

$$\text{empirical mean} = \hat{\mu}_n = \frac{1}{n} \sum_{t=1}^{n} Z_t$$

How close is $\hat{\mu}_n$ to μ?

A crash course in concentration

Let $Z, Z_1, Z_2, \ldots, Z_n$ be a sequence of independent and identically distributed random variables with mean $\mu \in \mathbb{R}$ and variance $\sigma^2 < \infty$

$$\text{empirical mean} = \hat{\mu}_n = \frac{1}{n}\sum_{t=1}^{n} Z_t$$

How close is $\hat{\mu}_n$ to μ?

Classical statistics says:

1. (law of large numbers) $\lim_{n\to\infty} \hat{\mu}_n = \mu$ almost surely
2. (central limit theorem) $\sqrt{n}(\hat{\mu}_n - \mu) \xrightarrow{d} \mathcal{N}(0, \sigma^2)$
3. (Chebyshev's inequality) $\mathbb{P}\left(|\hat{\mu}_n - \mu| \geq \varepsilon\right) \leq \frac{\sigma^2}{n\varepsilon^2}$

We need something nonasymptotic and stronger than Chebyshev's

Not possible without assumptions

A crash course in concentration

Random variable Z is σ-subgaussian if for all $\lambda \in \mathbb{R}$,

$$M_Z(\lambda) \doteq \mathbb{E}[\exp(\lambda Z)] \leq \exp\left(\lambda^2 \sigma^2 / 2\right)$$

Lemma If $Z, Z_1, \ldots, Z_n$ are independent and σ-subgaussian, then

- aZ is $|a|\sigma$-subgaussian for any $a \in \mathbb{R}$
- $\sum_{t=1}^n Z_t$ is $\sqrt{n}\sigma$-subgaussian
- $\hat{\mu}_n$ is $n^{-1/2}\sigma$-subgaussian

A crash course in concentration

Theorem If $Z_1, \ldots, Z_n$ are independent and σ-subgaussian, then

$$\mathbb{P}\left(\hat{\mu}_n \geq \sqrt{\frac{2\sigma^2 \log(1/\delta)}{n}}\right) \leq \delta$$

Proof We use **Chernoff's method**. Let $\varepsilon > 0$ and $\lambda = \varepsilon n / \sigma^2$.

A crash course in concentration

Theorem If $Z_1, \ldots, Z_n$ are independent and σ-subgaussian, then

$$\mathbb{P}\left(\hat{\mu}_n \geq \sqrt{\frac{2\sigma^2 \log(1/\delta)}{n}}\right) \leq \delta$$

Proof We use **Chernoff's method**. Let $\varepsilon > 0$ and $\lambda = \varepsilon n / \sigma^2$.

$$\mathbb{P}\left(\hat{\mu}_n \geq \varepsilon\right) = \mathbb{P}\left(\exp\left(\lambda \hat{\mu}_n\right) \geq \exp\left(\lambda \varepsilon\right)\right)$$

A crash course in concentration

Theorem If $Z_1, \ldots, Z_n$ are independent and σ-subgaussian, then

$$\mathbb{P}\left(\hat{\mu}_n \geq \sqrt{\frac{2\sigma^2 \log(1/\delta)}{n}}\right) \leq \delta$$

Proof We use **Chernoff's method**. Let $\varepsilon > 0$ and $\lambda = \varepsilon n / \sigma^2$.

$$\begin{aligned}
\mathbb{P}\left(\hat{\mu}_n \geq \varepsilon\right) &= \mathbb{P}\left(\exp\left(\lambda \hat{\mu}_n\right) \geq \exp\left(\lambda \varepsilon\right)\right) \\
&\leq \mathbb{E}\left[\exp\left(\lambda \hat{\mu}_n\right)\right] \exp(-\lambda \varepsilon) && \text{(Markov's)}
\end{aligned}$$

A crash course in concentration

Theorem If $Z_1, \ldots, Z_n$ are independent and σ-subgaussian, then

$$\mathbb{P}\left(\hat{\mu}_n \geq \sqrt{\frac{2\sigma^2 \log(1/\delta)}{n}}\right) \leq \delta$$

Proof We use **Chernoff's method**. Let $\varepsilon > 0$ and $\lambda = \varepsilon n / \sigma^2$.

$$\begin{aligned}
\mathbb{P}\left(\hat{\mu}_n \geq \varepsilon\right) &= \mathbb{P}\left(\exp\left(\lambda \hat{\mu}_n\right) \geq \exp\left(\lambda \varepsilon\right)\right) \\
&\leq \mathbb{E}\left[\exp\left(\lambda \hat{\mu}_n\right)\right] \exp(-\lambda \varepsilon) && \text{(Markov's)} \\
&\leq \exp\left(\sigma^2 \lambda^2 / (2n) - \lambda \varepsilon\right) \\
&= \exp\left(-n\varepsilon^2 / (2\sigma^2)\right)
\end{aligned}$$

A crash course in concentration

- Which distributions are σ-subgaussian? Gaussian, Bernoulli, bounded support.
- And not: exponential, power law
- Comparing Chebyshev's w. subgaussian bound:

Chebyshev's: $\sqrt{\frac{\sigma^2}{n\delta}}$ **Subgaussian:** $\sqrt{\frac{2\sigma^2 \log(1/\delta)}{n}}$

- Typically $\delta \ll 1/n$ in our use-cases

The results that follow hold when the distribution associated with each arm is 1-subgaussian

Analysing Explore-Then-Commit

- **Standard convention** Assume $\mu_1 \geq \mu_2 \geq \cdots \geq \mu_K$
- Algorithms are symmetric and do not exploit this fact
- Means that first arm is optimal

Analysing Explore-Then-Commit

- **Standard convention** Assume $\mu_1 \geq \mu_2 \geq \cdots \geq \mu_K$
- Algorithms are symmetric and do not exploit this fact
- Means that first arm is optimal
- Remember, Explore-Then-Commit chooses each arm m times
- Then commits to the arm with the largest payoff
- We consider only $K = 2$

Analysing Explore-Then-Commit

Step 1 Let $\hat{\mu}_i$ be the average reward after exploring

The algorithm commits to the wrong arm if

$$\hat{\mu}_2 \geq \hat{\mu}_1 \Leftrightarrow \hat{\mu}_2 - \mu_2 + \mu_1 - \hat{\mu}_1 \geq \Delta$$

Observation $\hat{\mu}_1 - \mu_1 + \mu_2 - \hat{\mu}_2$ is $\sqrt{2/m}$-subgaussian

Analysing Explore-Then-Commit

Step 1 Let $\hat{\mu}_i$ be the average reward after exploring

The algorithm commits to the wrong arm if

$$\hat{\mu}_2 \geq \hat{\mu}_1 \Leftrightarrow \hat{\mu}_2 - \mu_2 + \mu_1 - \hat{\mu}_1 \geq \Delta$$

Observation $\hat{\mu}_1 - \mu_1 + \mu_2 - \hat{\mu}_2$ is $\sqrt{2/m}$-subgaussian

Step 2 The regret is

$$\begin{aligned}
R_n &= \mathbb{E}\left[\sum_{t=1}^{n} \Delta_{A_t}\right] = \mathbb{E}\left[\sum_{t=1}^{2m} \Delta_{A_t}\right] + \mathbb{E}\left[\sum_{t=2m+1}^{n} \Delta_{A_t}\right] \\
&= m\Delta + (n-2m)\Delta\mathbb{P}\left(\text{commit to the wrong arm}\right) \\
&= m\Delta + (n-2m)\Delta\mathbb{P}\left(\hat{\mu}_2 - \mu_2 + \mu_1 - \hat{\mu}_1 \geq \Delta\right) \\
&\leq m\Delta + n\Delta \exp\left(-\frac{m\Delta^2}{4}\right)
\end{aligned}$$

Analysing Explore-Then-Commit

$$R_n \leq \underbrace{m\Delta}_{\text{(A)}} + \underbrace{n\Delta \exp(-m\Delta^2/4)}_{\text{(B)}}$$

(A) is monotone increasing in m while (B) is monotone decreasing in m

Exploration/Exploitation dilemma Exploring too much (m large) then (A) is big, while exploring too little makes (B) large

Bound minimised by $m = \left\lceil \frac{4}{\Delta^2} \log\left(\frac{n\Delta^2}{4}\right) \right\rceil$ leading to

$$R_n \leq \Delta + \frac{4}{\Delta} \log\left(\frac{n\Delta^2}{4}\right) + \frac{4}{\Delta}$$

Analysing Explore-Then-Commit

Last slide: $R_n \leq \Delta + \frac{4}{\Delta} \log\left(\frac{n\Delta^2}{4}\right) + \frac{4}{\Delta}$

What happens when Δ is very small?

Analysing Explore-Then-Commit

Last slide: $R_n \leq \Delta + \frac{4}{\Delta} \log\left(\frac{n\Delta^2}{4}\right) + \frac{4}{\Delta}$

What happens when Δ is very small?

$$R_n \leq \min\left\{n\Delta,\ \Delta + \frac{4}{\Delta} \log\left(\frac{n\Delta^2}{4}\right) + \frac{4}{\Delta}\right\}$$

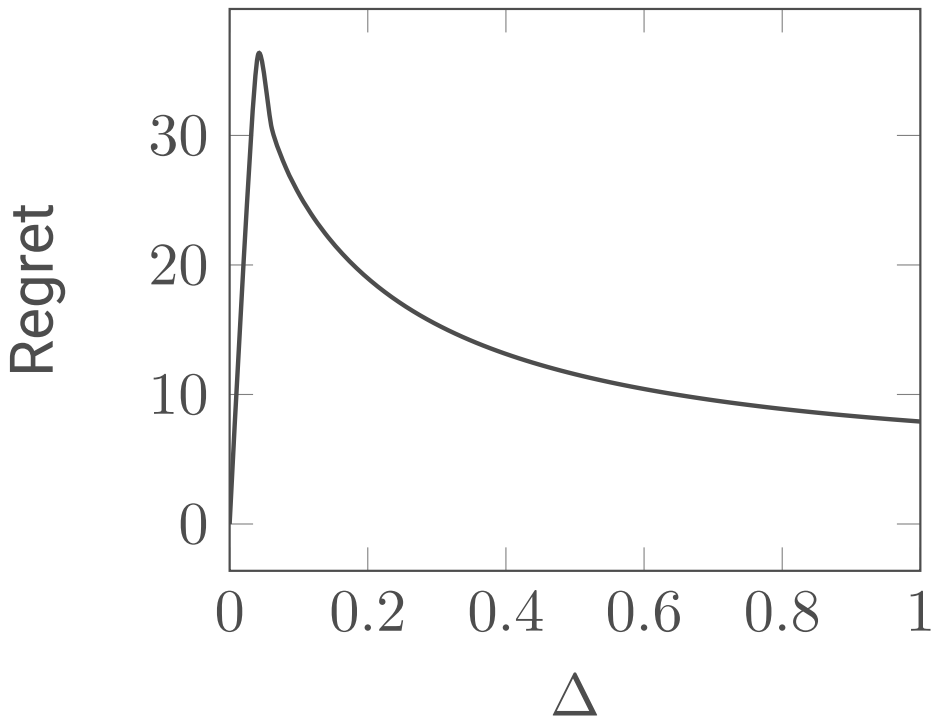

Analysing Explore-Then-Commit

Does this figure make sense? Why is the regret largest when Δ is small, but not too small?

$$R_n \leq \min\left\{n\Delta,\ \Delta + \frac{4}{\Delta}\log\left(\frac{n\Delta^2}{4}\right) + \frac{4}{\Delta}\right\}$$

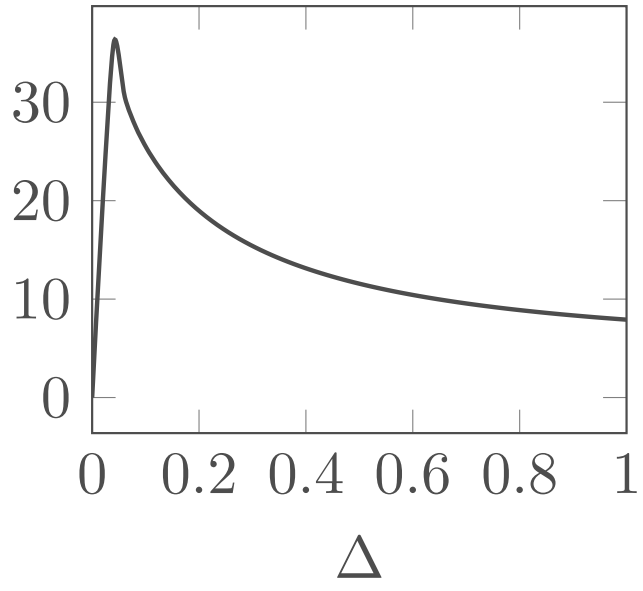

Analysing Explore-Then-Commit

Does this figure make sense? Why is the regret largest when Δ is small, but not too small?

$$R_n \leq \min\left\{n\Delta,\ \Delta + \frac{4}{\Delta}\log\left(\frac{n\Delta^2}{4}\right) + \frac{4}{\Delta}\right\}$$

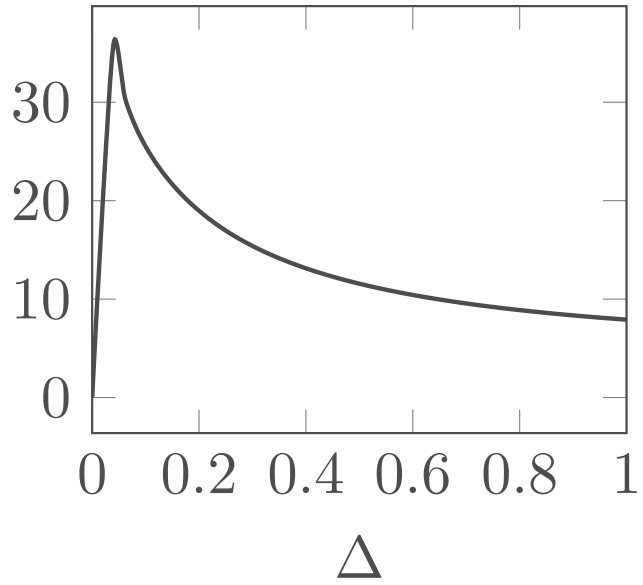

Small Δ makes identification hard, but cost of failure is low

Large Δ makes the cost of failure high, but identification easy

Worst case is when $\Delta \approx \sqrt{1/n}$ with $R_n \approx \sqrt{n}$

Limitations of Explore-Then-Commit

- Need advance knowledge of the horizon n
- Optimal tuning depends on Δ
- Does not behave well with $K > 2$
- Issues by using data to adapt the commitment time
- All variants of ETC are at least a factor of 2 from being optimal
- Better approaches now exist, but Explore-Then-Commit is often a good place to start when analysing a bandit problem

Optimism principle

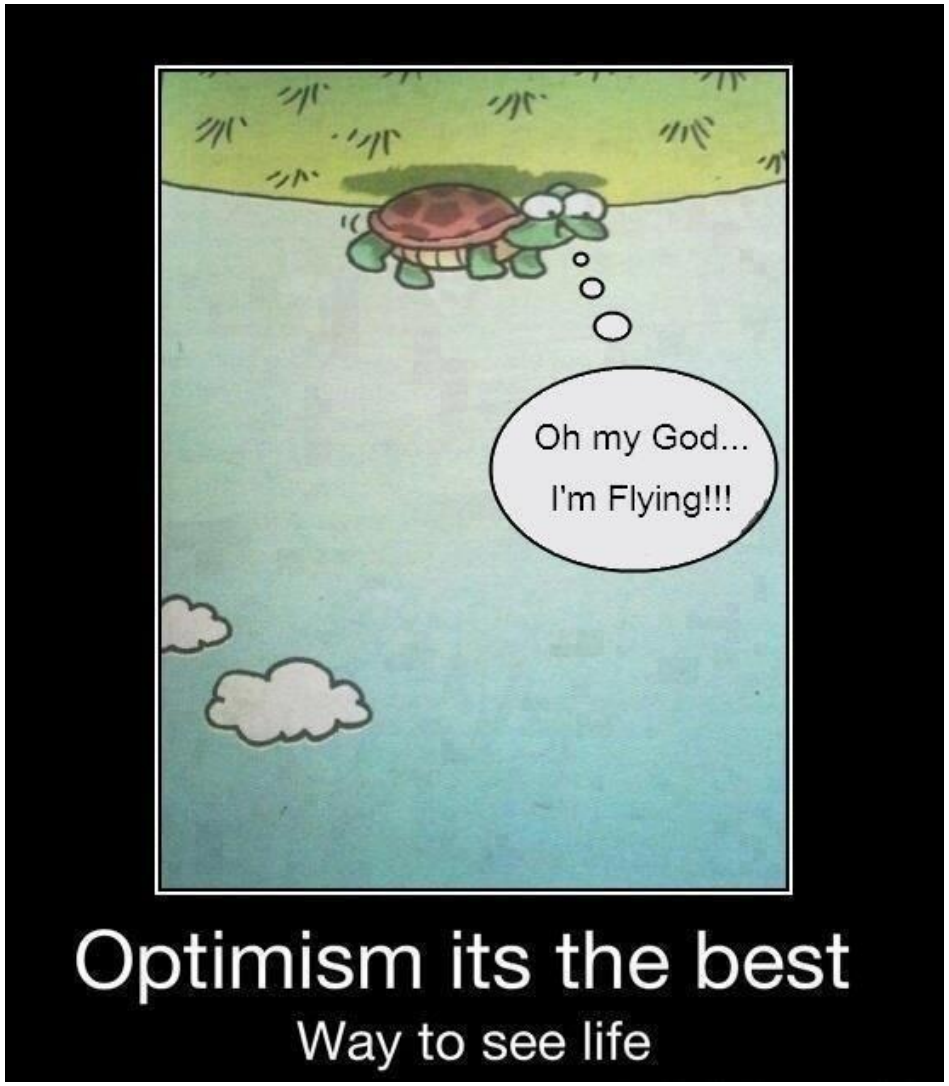

Informal illustration

Visiting a new region

Shall I try local cuisine?

Optimist: Yes!

Pessimist: No!

Optimism leads to exploration, pessimism prevents it

Exploration is necessary, but how much?

Optimism principle

- Let $\hat{\mu}_i(t) = \frac{1}{T_i(t)} \sum_{s=1}^{t} \mathbb{1}(A_s = i) X_s$
- Formalise the intuition using confidence intervals
- Optimistic estimate of the mean of arm = 'largest value it could plausibly be'
- Suggests

$$\text{optimistic estimate} = \hat{\mu}_i(t-1) + \sqrt{\frac{2\log(1/\delta)}{T_i(t-1)}}$$

- $\delta \in (0, 1)$ determines the level of optimism

Upper confidence bound algorithm

1 Choose each action once

2 Choose the action maximising

$$A_t = \mathrm{argmax}_i \, \hat{\mu}_i(t-1) + \sqrt{\frac{2\log(t^3)}{T_i(t-1)}}$$

3 **Goto** 2

Corresponds to $\delta = 1/t^3$

This is quite a conservative choice. More on this later

Algorithm does not depend on horizon n (it is **anytime**)

Demonstration

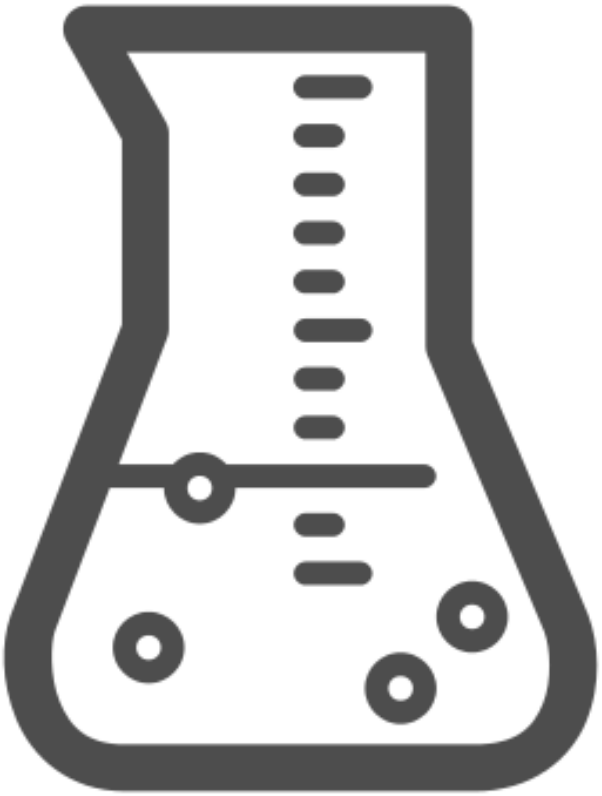

Regret of UCB

Theorem The regret of UCB is at most

$$R_n = O\left(\sum_{i:\Delta_i>0}\left(\Delta_i + \frac{\log(n)}{\Delta_i}\right)\right)$$

Furthermore,

$$R_n = O\left(\sqrt{Kn\log(n)}\right)$$

Bounds of the first kind are called **problem dependent** or **instance dependent**

Bounds like the second are called **distribution free** or **worst case**

Regret analysis

Rewrite the regret $R_n = \sum_{i=1}^{K} \Delta_i \mathbb{E}[T_i(n)]$

Only need to show that $\mathbb{E}[T_i(n)]$ is not too large for suboptimal arms

Regret analysis

Key insight Arm i is only played if its **index** is larger than the index of the optimal arm

Need to show two things:

(A) The index of the optimal arm is larger than its actual mean with high probability

(B) The index of suboptimal arms falls below the mean of the optimal arm after only a few plays

$$\gamma_i(t-1) = \underbrace{\hat{\mu}_i(t-1) + \sqrt{\frac{2\log(t^3)}{T_i(t-1)}}}_{\text{index of arm } i \text{ in round } t}$$

Analysis intuition

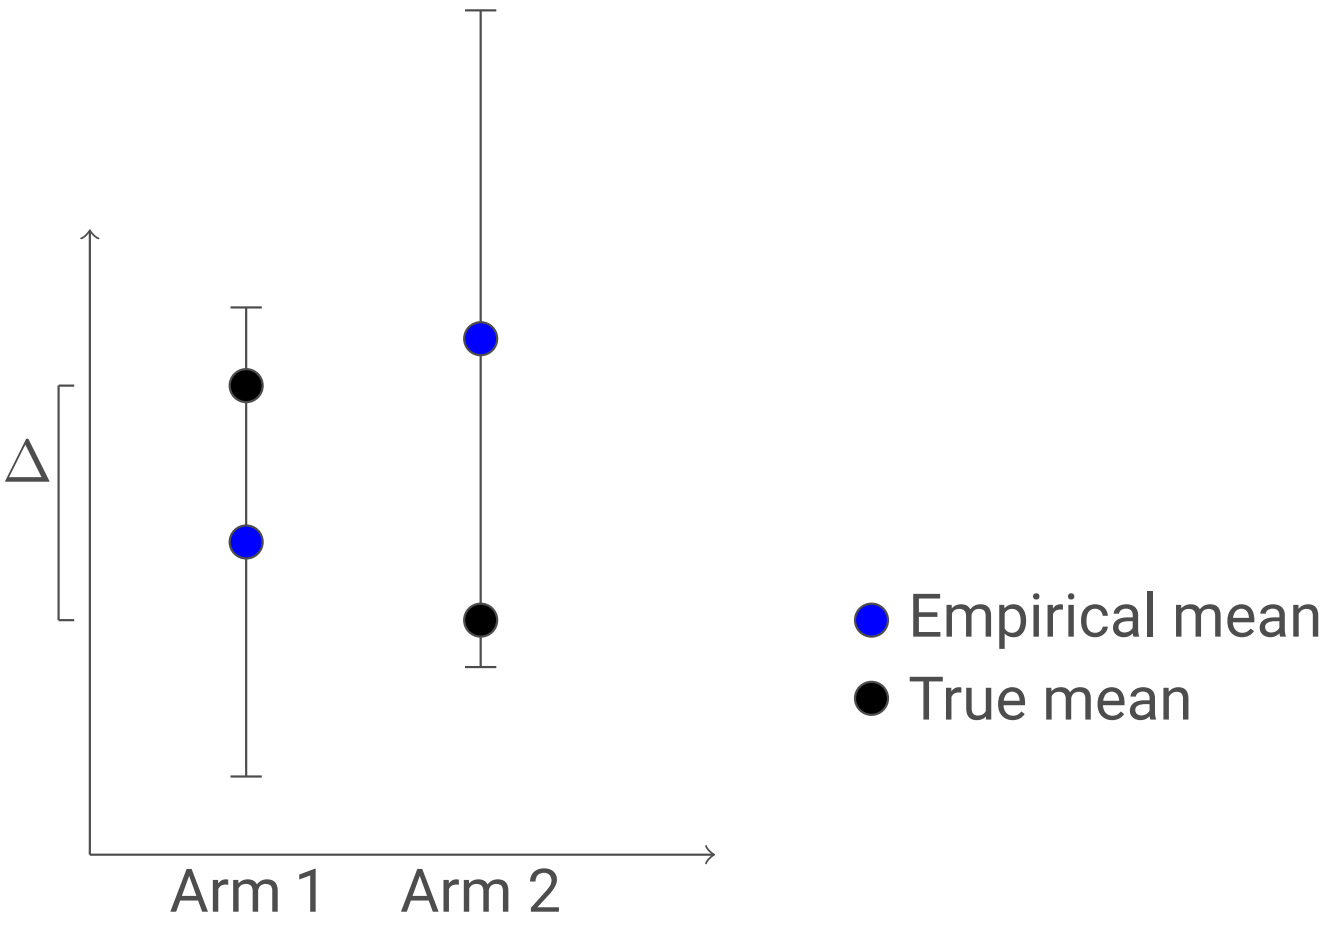

Analysis intuition

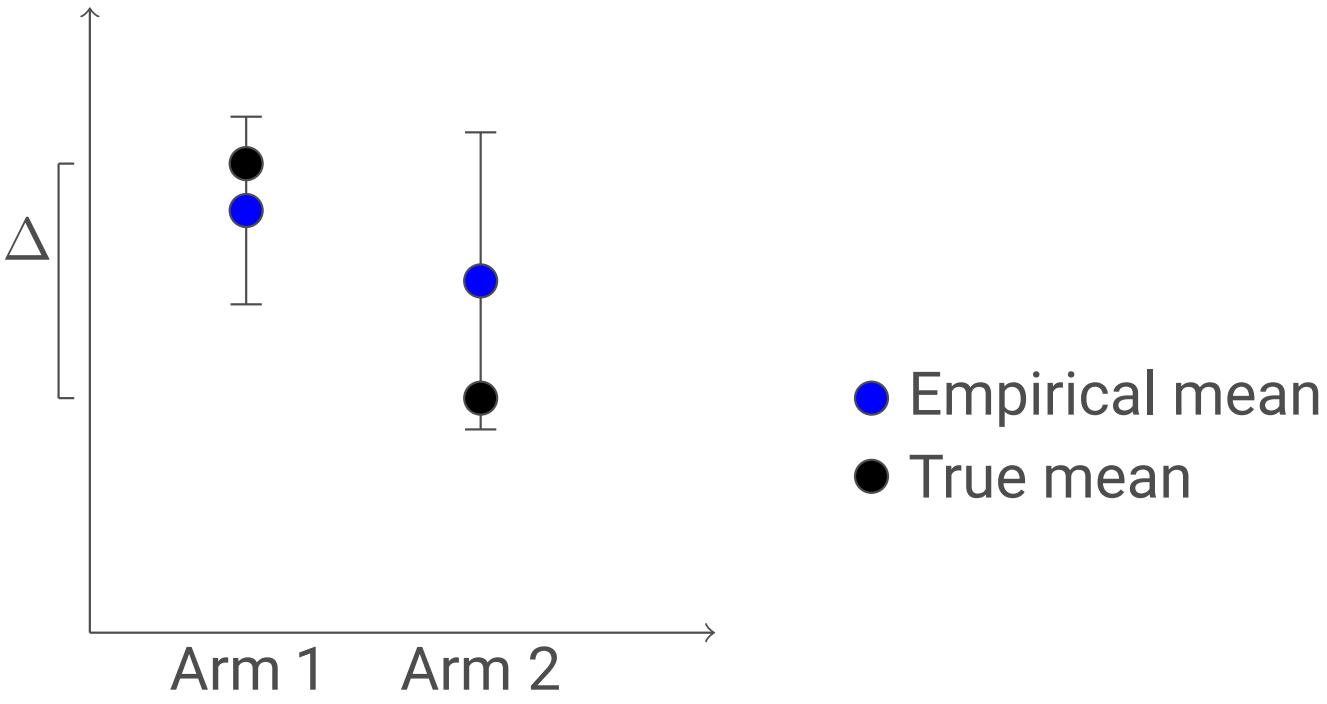

Regret analysis

To make this intuition a reality we decompose the ‘pull-count’

$$\mathbb{E}[T_i(n)] = \mathbb{E}\left[\sum_{t=1}^{n} \mathbb{1}(A_t = i)\right] = \sum_{t=1}^{n} \mathbb{P}\left(A_t = i\right)$$

$$= \sum_{t=1}^{n} \mathbb{P}\left(A_t = i \text{ and } \left(\gamma_1(t-1) \leq \mu_1 \text{ or } \gamma_i(t-1) \geq \mu_1\right)\right)$$

$$\leq \underbrace{\sum_{t=1}^{n} \mathbb{P}\left(\gamma_1(t-1) \leq \mu_1\right)}_{\text{index of opt. arm too small?}} + \underbrace{\sum_{t=1}^{n} \mathbb{P}\left(A_t = i \text{ and } \gamma_i(t-1) \geq \mu_1\right)}_{\text{index of subopt. arm large?}}$$

Regret analysis

We want to show that $\mathbb{P}\left(\gamma_1(t-1) \leq \mu_1\right)$ is small

Tempting to use the concentration theorem...

$$\mathbb{P}\left(\gamma_1(t-1) \leq \mu_1\right) = \mathbb{P}\left(\hat{\mu}_1(t-1) + \sqrt{\frac{2\log(t^3)}{T_i(t-1)}} \leq \mu_1\right) \overset{?}{\leq} \frac{1}{t^3}$$

What's wrong with this?

Regret analysis

We want to show that $\mathbb{P}\left(\gamma_1(t-1) \leq \mu_1\right)$ is small

Tempting to use the concentration theorem...

$$\mathbb{P}\left(\gamma_1(t-1) \leq \mu_1\right) = \mathbb{P}\left(\hat{\mu}_1(t-1) + \sqrt{\frac{2\log(t^3)}{T_i(t-1)}} \leq \mu_1\right) \overset{?}{\leq} \frac{1}{t^3}$$

What's wrong with this? $T_i(t-1)$ is a random variable!

$$\begin{aligned}
\mathbb{P}\left(\hat{\mu}_1(t-1) + \sqrt{\frac{2\log(t^3)}{T_i(t-1)}} \leq \mu_1\right) &\leq \mathbb{P}\left(\exists s < t : \hat{\mu}_{1,s} + \sqrt{\frac{2\log(t^3)}{s}} \leq \mu_1\right) \\
&\leq \sum_{s=1}^{t-1} \mathbb{P}\left(\hat{\mu}_{1,s} + \sqrt{\frac{2\log(t^3)}{s}} \leq \mu_1\right) \\
&\leq \sum_{s=1}^{t-1} \frac{1}{t^3} \leq \frac{1}{t^2}\,.
\end{aligned}$$

Regret analysis

$$\sum_{t=1}^{n} \mathbb{P}\left(A_t = i \text{ and } \gamma_i(t-1) \geq \mu_1\right) = \mathbb{E}\left[\sum_{t=1}^{n} \mathbb{1}(A_t = i \text{ and } \gamma_i(t-1) \geq \mu_1)\right]$$

$$= \mathbb{E}\left[\sum_{t=1}^{n} \mathbb{1}(A_t = i \text{ and } \hat{\mu}_i(t-1) + \sqrt{\frac{6\log(t)}{T_i(t-1)}} \geq \mu_1)\right]$$

$$\leq \mathbb{E}\left[\sum_{t=1}^{n} \mathbb{1}(A_t = i \text{ and } \hat{\mu}_i(t-1) + \sqrt{\frac{6\log(n)}{T_i(t-1)}} \geq \mu_1)\right]$$

$$\leq \mathbb{E}\left[\sum_{s=1}^{n} \mathbb{1}(\hat{\mu}_{i,s} + \sqrt{\frac{6\log(n)}{s}} \geq \mu_1)\right]$$

$$= \sum_{s=1}^{n} \mathbb{P}\left(\hat{\mu}_{i,s} + \sqrt{\frac{6\log(n)}{s}} \geq \mu_1\right)$$

Regret analysis

Let $u = \dfrac{24\log(n)}{\Delta_i^2}$. Then

$$\sum_{s=1}^{n} \mathbb{P}\left(\hat{\mu}_{i,s} + \sqrt{\frac{6\log(n)}{s}} \geq \mu_1\right) \leq u + \sum_{s=u+1}^{n} \mathbb{P}\left(\hat{\mu}_{i,s} + \sqrt{\frac{6\log(n)}{s}} \geq \mu_1\right)$$

$$\leq u + \sum_{s=u+1}^{n} \mathbb{P}\left(\hat{\mu}_{i,s} \geq \mu_i + \frac{\Delta_i}{2}\right)$$

$$\leq u + \sum_{s=u+1}^{\infty} \exp\left(-\frac{s\Delta_i^2}{8}\right)$$

$$\leq 1 + u + \frac{8}{\Delta_i^2}\,.$$

Regret analysis

Combining the two parts we have

$$\mathbb{E}[T_i(n)] \leq 3 + \frac{8}{\Delta_i^2} + \frac{24\log(n)}{\Delta_i^2}$$

So the regret is bounded by

$$R_n = \sum_{i:\Delta_i>0} \Delta_i \mathbb{E}[T_i(n)] \leq \sum_{i:\Delta_i>0} \left(3\Delta_i + \frac{8}{\Delta_i} + \frac{24\log(n)}{\Delta_i}\right)$$

Distribution free bounds

Let $\Delta > 0$ be some constant to be chosen later

$$R_n = \sum_{i:\Delta_i > 0} \Delta_i \mathbb{E}[T_i(n)] \leq n\Delta + \sum_{i:\Delta_i > \Delta} \Delta_i \mathbb{E}[T_i(n)]$$

$$\lesssim n\Delta + \sum_{i:\Delta_i > \Delta} \frac{\log(n)}{\Delta_i} \leq n\Delta + \frac{K\log(n)}{\Delta} \lesssim \sqrt{nK\log(n)}$$

where in the last line we tuned $\Delta = \sqrt{K\log(n)/n}$

Improvements

- The constants in the algorithm/analysis can be improved quite significantly.

$$A_t = \mathrm{argmax}_i \, \hat{\mu}_i(t-1) + \sqrt{\frac{2\log(t)}{T_i(t-1)}}$$

- With this choice:

$$\lim_{n\to\infty} \frac{R_n}{\log(n)} = \sum_{i:\Delta_i>0} \frac{2}{\Delta_i}$$

- The distribution-free regret is also improvable

$$A_t = \mathrm{argmax}_i \, \hat{\mu}_i(t-1) + \sqrt{\frac{4}{T_i(t-1)} \log\left(1 + \frac{t}{KT_i(t-1)}\right)}$$

- With this index we save a log factor in the distribution free bound

$$R_n = O(\sqrt{nK})$$

Lower bounds

- Two kinds of lower bound: distribution free (worst case) and instance-dependent
- What could an instance-dependent lower bound look like?
- Algorithms that always choose a fixed action?

Worst case lower bound

Theorem For every algorithm and n and $K \leq n$ there exists a K-armed Gaussian bandit such that $R_n \geq \sqrt{(K-1)n}/27$

Worst case lower bound

Theorem For every algorithm and n and $K \leq n$ there exists a K-armed Gaussian bandit such that $R_n \geq \sqrt{(K-1)n}/27$

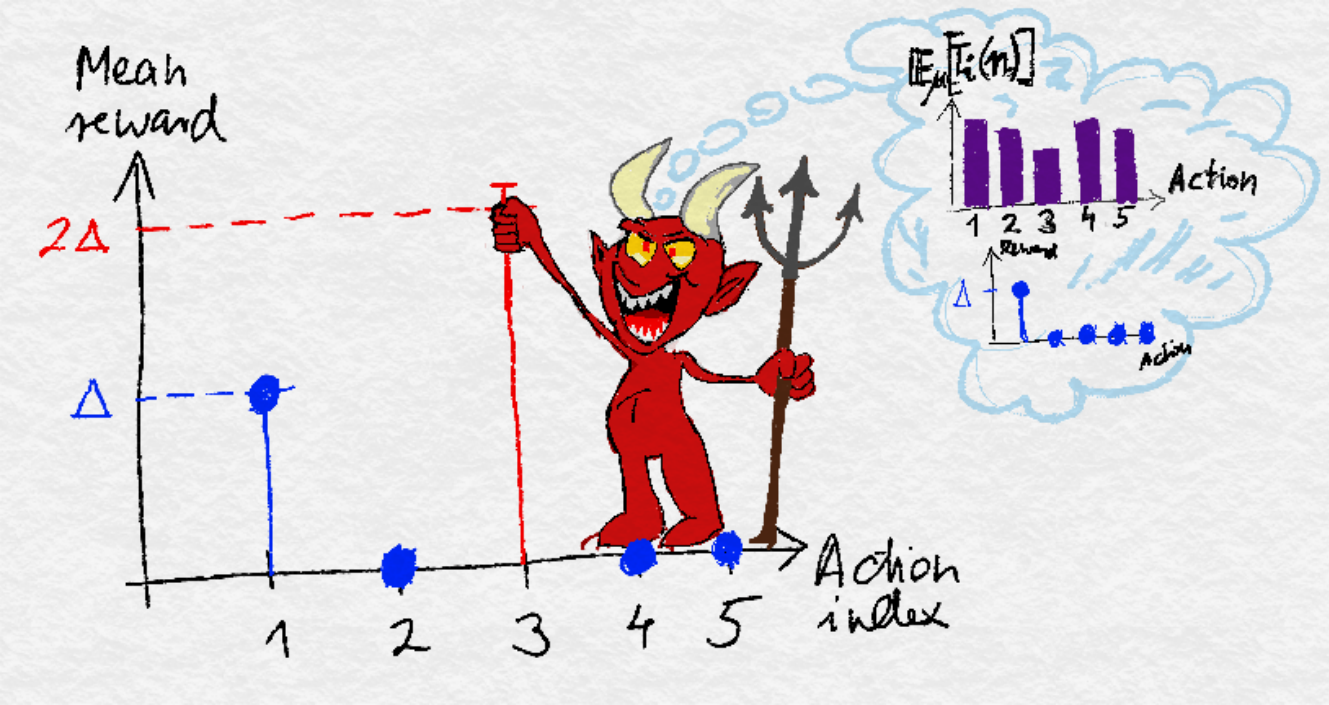

Proof sketch

- $\mu = (\Delta, 0, \ldots, 0)$

Worst case lower bound

Theorem For every algorithm and n and $K \leq n$ there exists a K-armed Gaussian bandit such that $R_n \geq \sqrt{(K-1)n}/27$

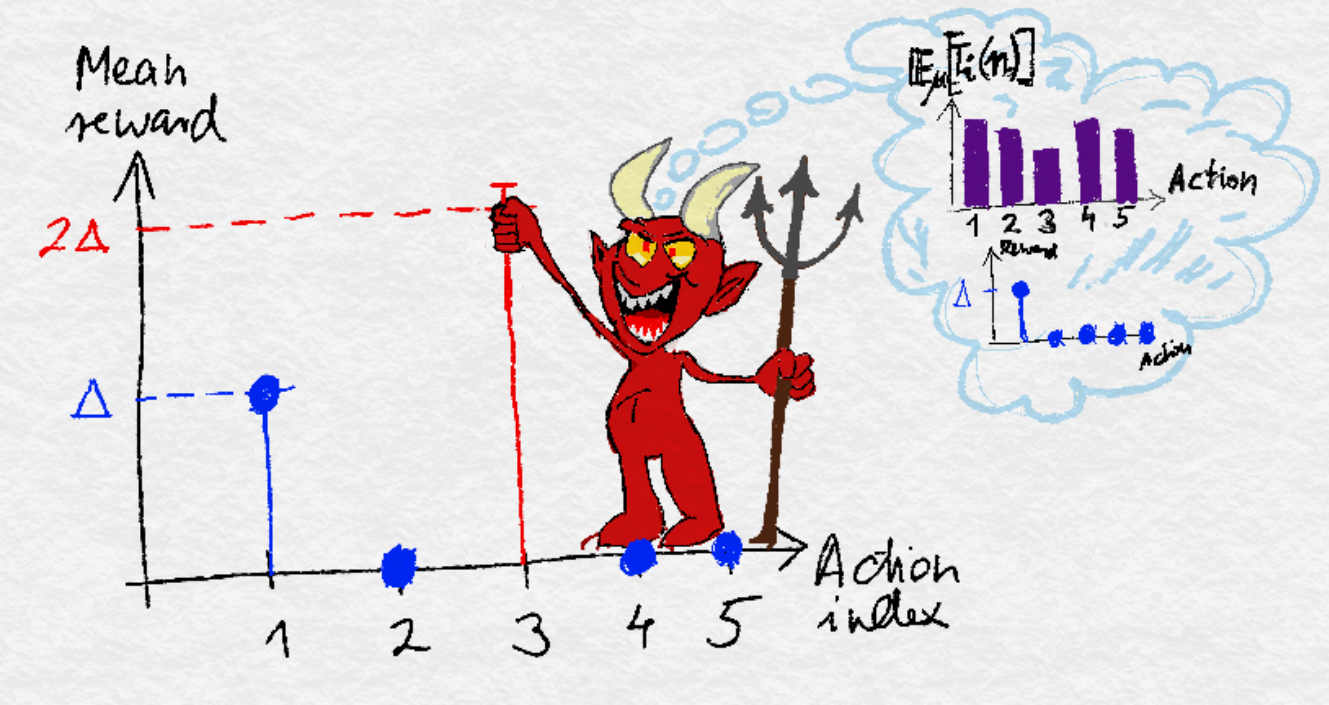

Proof sketch

- $\mu = (\Delta, 0, \ldots, 0)$
- $i = \operatorname{argmin}_{i>1} \mathbb{E}_\mu[T_i(n)]$
- $\mathbb{E}[T_i(n)] \leq n/(K-1)$

Worst case lower bound

Theorem For every algorithm and n and $K \leq n$ there exists a K-armed Gaussian bandit such that $R_n \geq \sqrt{(K-1)n}/27$

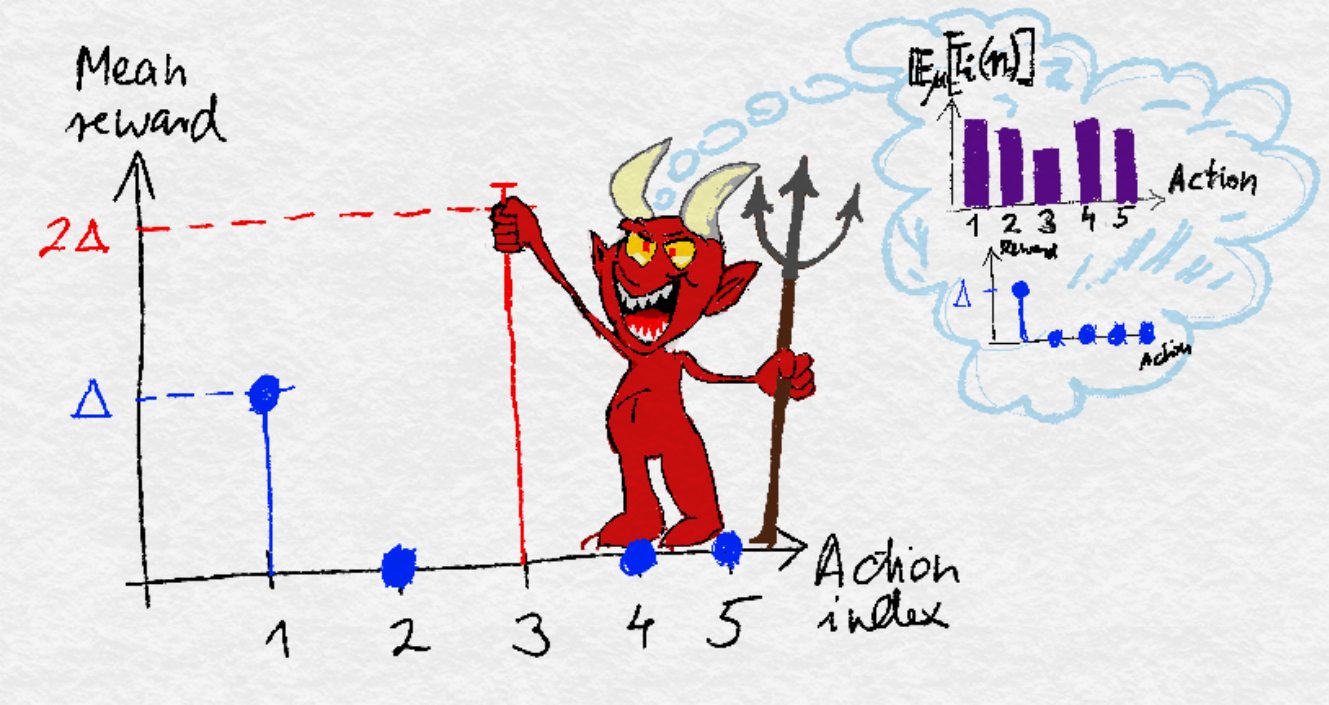

Proof sketch

- $\mu = (\Delta, 0, \ldots, 0)$
- $i = \operatorname{argmin}_{i>1} \mathbb{E}_\mu[T_i(n)]$
- $\mathbb{E}[T_i(n)] \leq n/(K-1)$
- $\mu' = (\Delta, 0, \ldots, 2\Delta, 0, \ldots, 0)$
- Envs. indistinguishable if $\Delta \approx \sqrt{K/n}$
- Suffers $n\Delta$ regret on one of them

Instance-dependent lower bounds

An algorithm is **consistent** on class of bandits $\mathcal{E}$ if $R_n = o(n)$ for all bandits in $\mathcal{E}$

Theorem If an algorithm is consistent for the class of Gaussian bandits, then

$$\liminf_{n\to\infty} \frac{R_n}{\log(n)} \geq \sum_{i:\Delta_i>0} \frac{2}{\Delta_i}$$

Instance-dependent lower bounds

An algorithm is **consistent** on class of bandits $\mathcal{E}$ if $R_n = o(n)$ for all bandits in $\mathcal{E}$

Theorem If an algorithm is consistent for the class of Gaussian bandits, then

$$\liminf_{n\to\infty} \frac{R_n}{\log(n)} \geq \sum_{i:\Delta_i>0} \frac{2}{\Delta_i}$$

- Consistency rules out stupid algorithms like the algorithm that always chooses a fixed action
- Consistency is asymptotic, so it is not surprising the lower bound we derive from it is asymptotic
- A non-asymptotic version of consistenncy leads to non-asymptotic lower bounds

What else is there?

- All kinds of variants of UCB for different noise models: Bernoulli, exponential families, heavy tails, Gaussian with unknown mean and variance,...
- A twist on UCB that replaces classifical confidence bounds with Bayesian confidence bounds – offers empirical improvements
- Thompson sampling: each round sample mean from posterior for each arm, choose arm with largest
- All manner of twists on the setup: non-stationarity, delayed rewards, playing multiple arms each round, moving beyond expected regret (high probability bounds)
- Different objectives: Simple regret, risk aversion

The adversarial viewpoint

- Replace random rewards with an **adversary**
- At the start of the game the adversary secretly chooses **losses** $y_1, y_2, \ldots, y_n$ where $y_t \in [0,1]^K$
- Learner chooses actions A_t and suffers loss y_{tA_t}
- Regret is

$$R_n = \underbrace{\mathbb{E}\left[\sum_{t=1}^{n} y_{tA_t}\right]}_{\text{learner's loss}} - \underbrace{\min_i \sum_{t=1}^{n} y_{ti}}_{\text{loss of best arm}}$$

- **Mission** Make the regret small, regardless of the adversary

The adversarial viewpoint

- Replace random rewards with an **adversary**
- At the start of the game the adversary secretly chooses **losses** $y_1, y_2, \ldots, y_n$ where $y_t \in [0,1]^K$
- Learner chooses actions A_t and suffers loss y_{tA_t}
- Regret is

$$R_n = \underbrace{\mathbb{E}\left[\sum_{t=1}^n y_{tA_t}\right]}_{\text{learner's loss}} - \underbrace{\min_i \sum_{t=1}^n y_{ti}}_{\text{loss of best arm}}$$

- **Mission** Make the regret small, regardless of the adversary
- There exists an algorithm such that

$$R_n \leq 2\sqrt{Kn}$$

The adversarial viewpoint

- The trick is in the definition of regret
- The adversary cannot be too mean

$$R_n = \underbrace{\mathbb{E}\left[\sum_{t=1}^{n} y_{tA_t}\right]}_{\text{learner's loss}} - \underbrace{\min_i \sum_{t=1}^{n} y_{ti}}_{\text{loss of best arm}}$$

$$y = \begin{pmatrix} 1 & \cdots & 1 & 0 & \cdots & 0 \\ 0 & \cdots & 0 & 1 & \cdots & 1 \end{pmatrix}$$

The adversarial viewpoint

- The trick is in the definition of regret
- The adversary cannot be too mean

$$R_n = \underbrace{\mathbb{E}\left[\sum_{t=1}^{n} y_{tA_t}\right]}_{\text{learner's loss}} - \underbrace{\min_i \sum_{t=1}^{n} y_{ti}}_{\text{loss of best arm}}$$

$$y = \begin{pmatrix} 1 & \cdots & 1 & 0 & \cdots & 0 \\ 0 & \cdots & 0 & 1 & \cdots & 1 \end{pmatrix}$$

- The following alternative objective is hopeless

$$R'_n = \underbrace{\mathbb{E}\left[\sum_{t=1}^{n} y_{tA_t}\right]}_{\text{learner's loss}} - \underbrace{\sum_{t=1}^{n} \min_i y_{ti}}_{\text{loss of best sequence}}$$

- **Randomisation** is crucial in adversarial bandits

Tackling the adversarial bandit

- Learner chooses distribution P_t over the K actions
- Samples $A_t \sim P_t$
- Observes $Y_t = y_{tA_t}$
- Expected regret is

$$R_n = \max_i \mathbb{E}\left[\sum_{t=1}^{n}(y_{tA_t} - y_{ti})\right] = \max_{p \in \Delta^K} \mathbb{E}\left[\sum_{t=1}^{n}\langle P_t - p, y_t\rangle\right]$$

- This looks a lot like online linear optimisation on a simplex
- Only y_t is not observed

Online convex optimisation (linear losses)

- $\mathcal{K} \subset \mathbb{R}^d$ is a convex set
- Adversary secretly chooses
  $y_1, \ldots, y_n \in \mathcal{K}^\circ = \{u : \sup_{x \in \mathcal{K}} |\langle x, u \rangle| \leq 1\}$
- Learner chooses $x_t \in \mathcal{K}$
- Suffers loss $\langle x_t, y_t \rangle$ and the regret with respect to $x \in \mathcal{K}$ is

$$R_n(x) = \sum_{t=1}^{n} \langle x_t - x, y_t \rangle \,.$$

- **How to choose** x_t? Most simple idea 'follow-the-leader'

$$x_t = \mathrm{argmin}_{x \in \mathcal{K}} \sum_{s=1}^{t-1} \langle x, y_s \rangle \,.$$

- Fails miserably: $\mathcal{K} = [-1, 1]$, $y_1 = 1/2$, $y_2 = -1$, $y_3 = 1, \ldots$

  and $x_1 = ?$, $x_2 = -1$, $x_3 = 1, \ldots$ leading to $R_n(0) \approx n$.

Follow the regularised leader

- **New idea** Add **regularization** to stabalize follow-the-leader
- Let F be a convex function and $\eta > 0$ be the **learning rate** and

$$x_t = \mathrm{argmin}_{x \in \mathcal{K}} \left(F(x) + \eta \sum_{s=1}^{t-1} \langle x, y_s \rangle \right)$$

- The **Bregman divergence** induced by F is

$$D_F(x, y) = F(x) - F(y) - \langle \nabla F(y), x - y \rangle$$

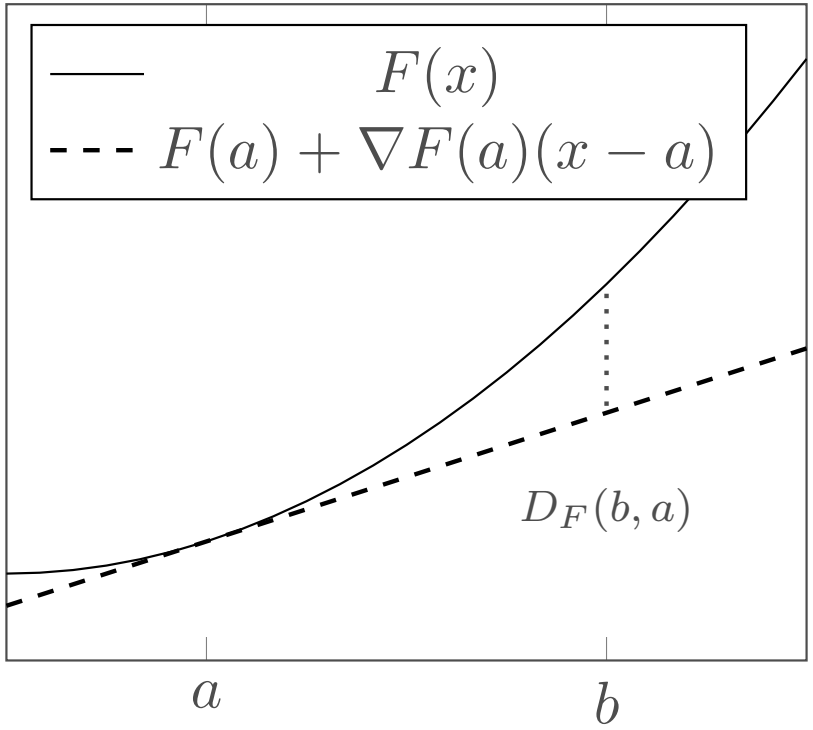

Follow the regularised leader

Theorem The regret of follow the regularised leader satisfies

$$R_n(x) \leq \frac{F(x) - F(x_1)}{\eta} + \sum_{t=1}^{n} \left(\langle x_t - x_{t+1}, y_t \rangle - \frac{1}{\eta} D_F(x_{t+1}, x_t) \right)$$

$$\leq \frac{F(x) - F(x_1)}{\eta} + \frac{\eta}{2} \sum_{t=1}^{n} \|y_t\|_{t*}^2$$

Tradeoffs How much to regularise?

Follow the regularised leader

Theorem The regret of follow the regularised leader satisfies

$$R_n(x) \leq \frac{F(x) - F(x_1)}{\eta} + \sum_{t=1}^{n} \left(\langle x_t - x_{t+1}, y_t \rangle - \frac{1}{\eta} D_F(x_{t+1}, x_t) \right)$$

$$\leq \frac{F(x) - F(x_1)}{\eta} + \frac{\eta}{2} \sum_{t=1}^{n} \|y_t\|_{t*}^2$$

Tradeoffs How much to regularise?

Let $z \in [x_t, x_{t+1}]$ be such that $D_F(x_t, x_{t+1}) = \frac{1}{2}\|x_t - x_{t+1}\|_{\nabla^2 F(z)}^2$ and $\|\cdot\|_t = \|\cdot\|_{\nabla^2 F(z)}$. Then

$$\langle x_t - x_{t+1}, y_t \rangle - \frac{D_F(x_{t+1}, x_t)}{\eta} \leq \|y_t\|_{t*} \|x_t - x_{t+1}\|_t - \frac{D_F(x_{t+1}, x_t)}{\eta}$$

$$= \|y_t\|_{t*} \sqrt{2 D_F(x_{t+1}, x_t)} - \frac{D_F(x_{t+1}, x_t)}{\eta} \leq \frac{\eta}{2} \|y_t\|_{t*}^2$$

Let $\Phi_t(x) = F(x)/\eta + \sum_{s=1}^{t} \langle x, y_s \rangle$

$$R_n(x) = \sum_{t=1}^{n} \langle x_t - x, y_t \rangle = \sum_{t=1}^{n} \langle x_{t+1} - x, y_t \rangle + \sum_{t=1}^{n} \langle x_t - x_{t+1}, y_t \rangle$$

Then using: $D_{\Phi_t}(\cdot,\cdot) = D_F(\cdot,\cdot)$ and $x_{t+1} = \operatorname{argmin}_x \Phi_t(x)$:

$$\sum_{t=1}^{n} \langle x_{t+1} - x, y_t \rangle = \frac{F(x)}{\eta} + \sum_{t=1}^{n} \left(\Phi_t(x_{t+1}) - \Phi_{t-1}(x_{t+1})\right) - \Phi_n(x)$$

$$= \frac{F(x)}{\eta} - \Phi_0(x_1) + \underbrace{\Phi_n(x_{n+1}) - \Phi_n(x)}_{\leq 0} + \sum_{t=0}^{n} \left(\Phi_t(x_{t+1}) - \Phi_t(x_{t+2})\right)$$

$$\leq \frac{F(x) - F(x_1)}{\eta} + \sum_{t=0}^{n-1} \left(\Phi_t(x_{t+1}) - \Phi_t(x_{t+2})\right)$$

$$= \frac{F(x) - F(x_1)}{\eta} - \sum_{t=0}^{n-1} \left(D_{\Phi_t}(x_{t+2}, x_{t+1}) + \underbrace{\langle \nabla \Phi_t(x_{t+1}), x_{t+2} - x_{t+1} \rangle}_{\geq 0} \right)$$

Follow the regularised leader for bandits

- Estimate y_t with unbiased **importance weighted estimator** $\hat{Y}_t$

$$\hat{Y}_{ti} = \frac{\mathbb{1}(A_t = i) y_{ti}}{P_{ti}}$$

- Then the expected regret satisfies

$$\mathbb{E}[R_n] = \max_i \mathbb{E}\left[\sum_{t=1}^n y_{tA_t} - y_{ti}\right] = \max_i \mathbb{E}\left[\sum_{t=1}^n \langle P_t - e_i, \hat{Y}_t \rangle\right]$$

- Choosing $P_t = \operatorname{argmin}_p \frac{F(p)}{\eta} + \sum_{s=1}^{t-1} \langle p, \hat{Y}_s \rangle$ leads to

$$\mathbb{E}[R_n] \leq \frac{F(e_i) - F(P_1)}{\eta} + \frac{\eta}{2} \sum_{t=1}^n \|\hat{Y}_t\|_{t*}^2$$

- We *just* need to choose F carefully

Follow the regularised leader for bandits

- We showed $\mathbb{E}[R_n] \leq \mathbb{E}\left[\frac{F(e_i) - F(P_1)}{\eta} + \frac{\eta}{2}\sum_{t=1}^{n} \|\hat{Y}_t\|_{t*}^2\right]$
- Let's randomly choose the **unnormalised negentropy**

$$F(p) = \sum_{i=1}^{K} p_i \log(p_i) - p_i$$

- An 'easy' calculation shows that $P_{ti} = \frac{\exp\left(-\eta \sum_{s=1}^{t-1} \hat{Y}_{si}\right)}{\sum_{j=1}^{K} \exp\left(-\eta \sum_{s=1}^{t-1} \hat{Y}_{sj}\right)}$
- Then $F(e_i) - F(P_1) \leq \log(K)$. For the dual norm,

$$\nabla^2 F(p) = \mathrm{diag}(1/p) \implies \|y\|_{t*}^2 = \sum_{i=1}^{K} p_i y_i^2 \text{ for some } p \in [P_t, P_{t+1}]$$

- $\hat{Y}_{ti}$ is positive and $\hat{Y}_{ti} = 0$ unless $A_t = i$. So $P_{t+1,A_t} \leq P_{tA_t}$ and

$$\|\hat{Y}_t\|_{t*}^2 \leq P_{tA_t} \hat{Y}_{tA_t}^2$$

Follow the regularised leader for bandits

- Now we have

$$
\begin{aligned}
\mathbb{E}[R_n] &\leq \frac{\log(K)}{\eta} + \frac{\eta}{2}\mathbb{E}\left[\sum_{t=1}^{n} P_{tA_t}\hat{Y}_{tA_t}^2\right] \\
&= \frac{\log(K)}{\eta} + \frac{\eta}{2}\mathbb{E}\left[\sum_{t=1}^{n} \frac{y_{tA_t}^2}{P_{tA_t}}\right] \\
&\leq \frac{\log(K)}{\eta} + \frac{\eta}{2}\mathbb{E}\left[\sum_{t=1}^{n} \frac{1}{P_{tA_t}}\right] \\
&= \frac{\log(K)}{\eta} + \frac{\eta}{2}\mathbb{E}\left[\sum_{t=1}^{n}\sum_{i=1}^{K} P_{ti} \cdot \frac{1}{P_{ti}}\right] \\
&= \frac{\log(K)}{\eta} + \frac{\eta n K}{2} \\
&\leq \sqrt{2nK\log(K)}
\end{aligned}
$$

Adversarial bandits

- Instance-dependence?
- Moving beyond expected regret (high probability bounds)
- Why bother with stochastic bandits?
- Best of both worlds? Bubeck and Slivkins (2012); Seldin and Lugosi (2017); Auer and Chiang (2016)
- **Big myth** Adversarial bandits do not address nonstationarity

Resources

- Book by Bubeck and Cesa-Bianchi (2012)
- Book by Cesa-Bianchi and Lugosi (2006)
- The Bayesian books by Gittins et al. (2011) and Berry and Fristedt (1985). Both worth reading.
- Our online notes: `http://banditalgs.com`
- Notes by Aleksandrs Slivkins: `http://slivkins.com/work/MAB-book.pdf`
- We will soon release a 450 page book ("Bandit Algorithms" to be published by Cambridge)

Historical notes

- First paper on bandits is by Thompson (1933). He proposed an algorithm for two-armed Bernoulli bandits and hand-runs some simulations (Thompson sampling)
- Popularised enormously by Robbins (1952)
- Confidence bounds first used by Lai and Robbins (1985) to derive asymptotically optimal algorithm
- UCB by Katehakis and Robbins (1995) and Agrawal (1995). Finite-time analysis by Auer et al. (2002)
- Adversarial bandits: Auer et al. (1995)
- Minimax optimal algorithm by Audibert and Bubeck (2009)

References I

Agrawal, R. (1995). Sample mean based index policies with O(log n) regret for the multi-armed bandit problem. *Advances in Applied Probability*, pages 1054–1078.

Audibert, J.-Y. and Bubeck, S. (2009). Minimax policies for adversarial and stochastic bandits. In *Proceedings of Conference on Learning Theory (COLT)*, pages 217–226.

Auer, P., Cesa-Bianchi, N., and Fischer, P. (2002). Finite-time analysis of the multiarmed bandit problem. *Machine Learning*, 47:235–256.

Auer, P., Cesa-Bianchi, N., Freund, Y., and Schapire, R. E. (1995). Gambling in a rigged casino: The adversarial multi-armed bandit problem. In *Foundations of Computer Science, 1995. Proceedings., 36th Annual Symposium on*, pages 322–331. IEEE.

Auer, P. and Chiang, C. (2016). An algorithm with nearly optimal pseudo-regret for both stochastic and adversarial bandits. In *Proceedings of the 29th Conference on Learning Theory, COLT 2016, New York, USA, June 23-26, 2016*, pages 116–120.

Berry, D. and Fristedt, B. (1985). *Bandit problems : sequential allocation of experiments*. Chapman and Hall, London ; New York :.

Bubeck, S. and Cesa-Bianchi, N. (2012). *Regret Analysis of Stochastic and Nonstochastic Multi-armed Bandit Problems*. Foundations and Trends in Machine Learning. Now Publishers Incorporated.

Bubeck, S. and Slivkins, A. (2012). The best of both worlds: Stochastic and adversarial bandits. In *COLT*, pages 42.1–42.23.

Bush, R. R. and Mosteller, F. (1953). A stochastic model with applications to learning. *The Annals of Mathematical Statistics*, pages 559–585.

Cesa-Bianchi, N. and Lugosi, G. (2006). *Prediction, learning, and games*. Cambridge university press.

References II

Gittins, J., Glazebrook, K., and Weber, R. (2011). *Multi-armed bandit allocation indices*. John Wiley & Sons.

Katehakis, M. N. and Robbins, H. (1995). Sequential choice from several populations. *Proceedings of the National Academy of Sciences of the United States of America*, 92(19):8584.

Lai, T. L. and Robbins, H. (1985). Asymptotically efficient adaptive allocation rules. *Advances in applied mathematics*, 6(1):4–22.

Robbins, H. (1952). Some aspects of the sequential design of experiments. *Bulletin of the American Mathematical Society*, 58(5):527–535.

Seldin, Y. and Lugosi, G. (2017). An improved parametrization and analysis of the EXP3++ algorithm for stochastic and adversarial bandits. In *COLT*, pages 1743–1759.

Thompson, W. (1933). On the likelihood that one unknown probability exceeds another in view of the evidence of two samples. *Biometrika*, 25(3/4):285–294.

Random concentration failure

Let $X_1, X_2, \ldots$ be a sequence of independent and identically distributed standard Gaussian. For any n we have

$$\mathbb{P}\left(\sum_{t=1}^{n} X_t \geq \sqrt{2n\log(1/\delta)}\right) \leq \delta$$

Want to show this can fail if n is replaced by random variable T

Random concentration failure

Let $X_1, X_2, \ldots$ be a sequence of independent and identically distributed standard Gaussian. For any n we have

$$\mathbb{P}\left(\sum_{t=1}^{n} X_t \geq \sqrt{2n\log(1/\delta)}\right) \leq \delta$$

Want to show this can fail if n is replaced by random variable T

Law of the iterated logaritm says that

$$\limsup_{n\to\infty} \frac{\sum_{t=1}^{n} X_t}{\sqrt{2n\log\log(n)}} = 1 \qquad \text{almost surely}$$

Let $T = \min\{n : \sum_{t=1}^{n} X_t \geq \sqrt{2n\log(1/\delta)}\}$. Then $\mathbb{P}\left(T < \infty\right) = 1$ and

$$\mathbb{P}\left(\sum_{t=1}^{T} X_t \geq \sqrt{2T\log(1/\delta)}\right) = 1\,.$$

Contradiction! (works if T is independent of $X_1, X_2, \ldots$ though)